




World Leaders in Artificial Lift Products

Multi-Fit Casing Bowl

The **Multi-Fit Casing Bowl** reduces cost and well downtime by making use of a modular design that allows for multiple easy to install Head & Side Adapter options on the same casing bowl.

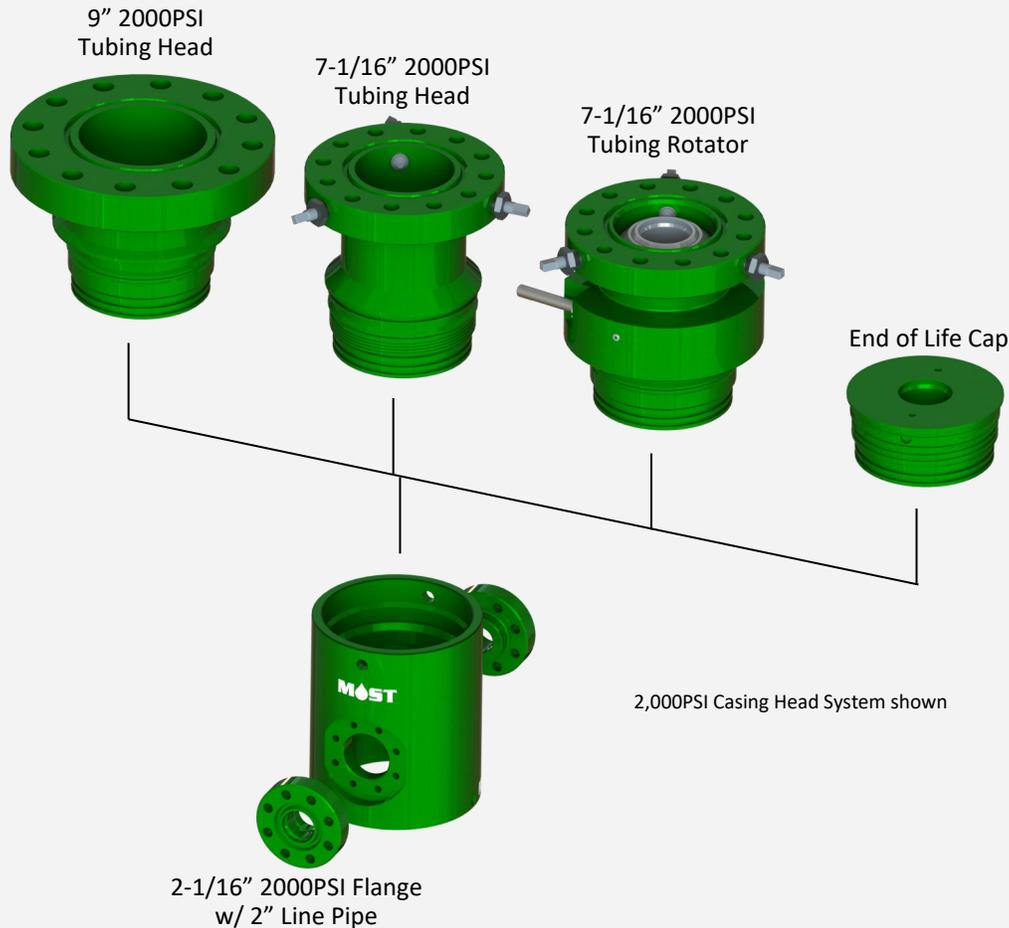

- Removable top flange can be reused on the next well, or pulled for repair.
- Replaceable casing side port to easily replace washouts.
- Quickly replace side ports or top flange instead of dangerous hot-work repairs.
- Mix and match: Use a 7-1/16" flange on a 8-5/8" casing for cost savings.
- Direct mount rotator to avoid additional connections and costs.
- Walk-away plug or end of life cap for after abandonment workover.
- Change the pressure rating by installing a different flange.
- NACE MR0175 compliant.
- Available pressure ratings: 2,000PSI, 3,000PSI and 5,000PSI.