




World Leaders in Artificial Lift Products

Modular Stuffing Box

The **Modular Stuffing Box** was design to provide our customers with simple alternatives to maintain a wide range of operational requirements. The design allows the interchange of parts to go from a simple high pressure stuffing box to a pivoting unit that will self-align with the movement of the polished rod.

- Modular design.
- All parts are manufactured to be NACE compliant.
- Maximum rated speed 500fpm or 500RPM.
- Static working pressure 3,000PSI and 5,000PSI.
- Available with flange or pin connection.
- Available with self-alignment pivot module, to correct up to 5° movement on the vertical.
- Available with spill mitigation device (flapper).
- Leak detector port between upper and lower packing.
- Standard polished rod size 1-1/4" and 1-1/2".
- Several packing options available.
- High temperature operation available (continuous 300°C (572°C), burst at 343°C (650°C)).

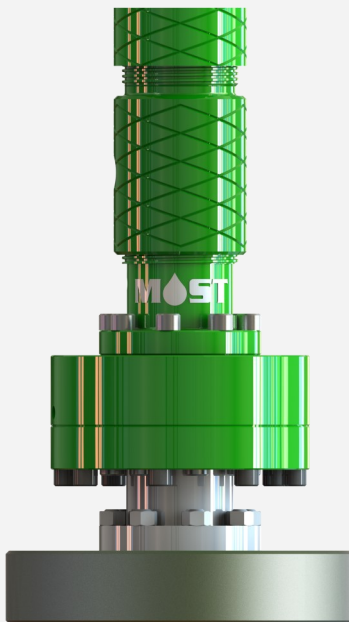

Flanged connection with Pivot
module Stuffing Box



Basic Pin end Stuffing Box



Flapper Pin end Stuffing Box